



FFW

PATENT  
03370-P0074A WWW

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants	Hans Welin, <i>et al.</i>
Serial No. 10/805,859	Filing Date: March 22, 2004
Title of Application:	An Air Dryer
Confirmation No. 1723	Art Unit: 3671
Examiner	

Commissioner for Patents  
Post Office Box 1450  
Alexandria, VA 22313-1450

**Submission of Priority Document**

Dear Sir:

Applicants hereby submit a certified copy of the priority document,  
Swedish Application No. 0300763-0, to perfect Applicants' claim of priority.

Respectfully submitted,

Wesley W. Whitmyer, Jr., Registration No. 33,558  
Attorney for Applicants  
ST.ONGE STEWARD JOHNSTON & REENS LLC  
986 Bedford Street  
Stamford, CT 06905-5619  
203 324-6155

**Mailing Certificate:** I hereby certify that this correspondence is today being deposited  
with the U.S. Postal Service as *First Class Mail* in an envelope addressed to:  
Commissioner for Patents and Trademarks; Post Office Box 1450; Alexandria, VA  
22313-1450.

July 29, 2004

  
\_\_\_\_\_  
Gregory D. Venuto

# PRV

PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen

## Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

*This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.*

(71) Sökande Haldex Brake Products AB, Landskrona SE  
Applicant (s)

(21) Patentansökningsnummer 0300763-0  
Patent application number

(86) Ingivningsdatum 2003-03-21  
Date of filing

Stockholm, 2004-04-15

För Patent- och registreringsverket  
For the Patent- and Registration Office



Hjordis Segerlund

Avgift  
Fee 170:-

**CERTIFIED COPY OF  
PRIORITY DOCUMENT**

**AN AIR DRYER****Field of the Invention**

5       The present invention relates to an air dryer, comprising a base member and a main cartridge attached thereto and containing means for filtering, cleaning and/or drying air passing therethrough. It also relates to an intermediate cartridge for such an air dryer.

10       **Background of the Invention**

      An air dryer of the above kind is used, for example on a heavy road vehicle, for drying compressed air delivered from a compressor. The cartridge, here called the main cartridge, may for example contain silica gel with  
15       small pores for the drying function, and such a cartridge is available on the market, also as a spare part.

      It may, however, be desirable with a more complex treatment of the compressed air for improving its quality, before it is transferred to different consumers, where the  
20       air quality is of essence.

**The Invention**

      In an air dryer as defined above, this may be accomplished in that an intermediate cartridge, containing means for filtering, cleaning and/or drying air passing  
25       therethrough, is arranged between the base member and the main cartridge.

      Such an intermediate cartridge can accordingly supplement the main cartridge for improving the quality of the treated air, still allowing the main cartridge to be  
30       used and not necessitating any design changes.

      In order to make use of the intermediate cartridge the main cartridge is dismounted from the base member, the intermediate cartridge mounted thereon, and the main cartridge again mounted on top of the intermediate  
35       cartridge.

**BEST AVAILABLE COPY**

If the main cartridge contains silica gel with fine pores, which is the case in a commercially available cartridge, the intermediate cartridge may in one embodiment of the invention contain a pre-filter and silica gel with large pores for the air flow before the main cartridge and molecular sieve and a fine filter for the air flow after the main cartridge.

#### **The Drawings**

The invention will be described in further detail below under reference to the accompanying drawing, in which

Fig 1 is a perspective view, partly in section, of an air dryer with a device according to the invention, and

Figs 2-4 are sections to a larger scale through three embodiments of a device according to the invention.

#### **Detailed Description of Embodiments**

As is well known in the art, a conventional air dryer basically comprises a base member 1 and mounted thereon a cartridge 2 containing air drying means, hereinafter called a main cartridge. According to the present invention an intermediate cartridge 3 is provided between the base member 1 and the main cartridge 2.

In a non-limiting, exemplary embodiment, the main cartridge 2 contains silica gel with fine pores 4 in a container 5. In the main cartridge 2 air to be dried is transferred from its bottom to its top in an annular slot 6 outside the container 5 and flows down to its bottom through the silica gel with fine pores 4. The dried air leaves the main cartridge 2 at its center portion.

Normally, this commercially available main cartridge 2 is threadingly attached directly on the base member 1, which contains means for directing the air flow into the main cartridge 2 and for receiving the dried air therefrom.

An intermediate cartridge 3, which is shown in greater detail in Fig 2, can according to the invention be arranged between the base member 1 and the main cartridge

2. For this purpose, it is provided with a central internal thread 7 in its bottom portion (for cooperation with a corresponding external thread in the base member 1) and a central external thread 8 in its upper portion (for cooperation with a corresponding internal thread in the main container 2).

Hereby, the intermediate cartridge 3 can be screwed on the base member 1, whereupon the main cartridge 2 can be screwed on the intermediate cartridge 3.

The internal design of the intermediate cartridge 3 will not be described in detail, as it is of less significance for a proper understanding of the invention and is a matter of choice for a person skilled in the art. It is sufficient to note that an outer cylindrical housing 9 of the intermediate cartridge 3 shall be able to withstand at least the same internal pressure as the housing of the main cartridge 2 and that its internal parts are held together by a central screw 10 in this specific embodiment.

The air flow through this non-limiting, exemplary intermediate cartridge 3 is indicated in Fig 2. Air flows in from the base member 1 (not shown in Fig 2) through a ring-shaped pre-filter 11 and up through an annular compartment inside the cylindrical housing 9 containing silica gel with large pores 12.

The air then leaves the intermediate cartridge 3 and enters the main cartridge 2, described above. The air again enters the intermediate cartridge 3 at its top center after having passed the silica gel with fine pores 4 in the main cartridge 2.

The central compartment of the intermediate cartridge 3, separated from said annular compartment by a cylindrical dividing wall 13, contains desiccant or molecular sieve 14.

Before the air leaves the intermediate cartridge 3 at its bottom center and enters the base member 1 (not shown in Fig 2), it passes a fine filter 15.

The pre-filter 11 will prevent larger particles, water, and liquids from passing.

The silica gel with large pores 12 will prevent larger carbon compounds and other chemical compounds from passing and will take up water in liquid form; also the molecular sieve (vide below) will be protected against chemical decomposition.

The silica gel with fine pores 4 will prevent smaller carbon compounds from passing and will take up water in vapour form; also the molecular sieve will be protected from exposure to free water.

The desiccant or molecular sieve 14 removes the remaining moisture from the air and lowers the dew point maximally.

The fine filter 15 takes up small particles generated in earlier portions of the aggregate air dryer.

Further information about the different stages and material in the air dryer assembly formed by the intermediate cartridge and the main cartridge may be obtained from WO 01/26783.

The embodiment described under reference to Figs 1 and 2 is just exemplary, as has been pointed out above. The basic thought to provide an intermediate cartridge between the base member and the main cartridge may be utilized in different embodiments depending on for example the content of the main container. Without altering the design of the main container the intermediate cartridge may provide an added treatment quality for the compressed air.

In this context, it may first be observed that the shown and described embodiment utilizes assembly based on thread engagement, which may be constructed in different ways. Other assembly means are equally feasible, such as a

10 In the Fig 3 embodiment the air from the base member  
passes the annular outer compartment through a filter and a  
cleaning and/or drying medium, before it enters the main  
cartridge. After having passed therethrough, it again  
enters the central compartment of the intermediate  
15 cartridge containing in this case only an outlet filter and  
returns to the base member.

**CLAIMS**

1. An air dryer, comprising a base member (1) and a main cartridge (2) attached thereto and containing means (4) for filtering, cleaning and/or drying air passing therethrough, characterized in that an intermediate cartridge (3), containing means (11, 12, 14, 15) for filtering, cleaning and/or drying air passing therethrough, is arranged between the base member (1) and the main cartridge (2).
2. An air dryer according to claim 1, wherein the means (11, 12, 14, 15) for filtering, cleaning and/or drying air in the intermediate cartridge (3) are arranged to complement and/or supplement the means (4) for filtering, cleaning and/or drying air in the main cartridge (2).
3. An air dryer according to claim 1, wherein the intermediate cartridge (3) is arranged to be fastened by corresponding means as the main cartridge (2) to the base member (1).
4. An air dryer according to claim 3, wherein the intermediate cartridge (3) is provided with a central internal thread (7) in its bottom portion for cooperation with a corresponding external thread in the base member (1) and a central external thread (8) in its upper portion for cooperation with a corresponding internal thread in the main container (2).
5. An air dryer according to claim 2, wherein the main cartridge (2) contains silica gel with fine pores (4) or molecular sieve and the intermediate cartridge (3) contains a pre-filter (11) and silica gel with large pores (12) for the air flow before the main cartridge (2) and molecular sieve (14) and a fine filter (15) for the air flow after the main cartridge.
6. An air dryer according to claim 5, wherein the silica gel with large pores (12) is arranged in an annular



PUBLISHED

outer compartment of the intermediate cartridge (3) and the molecular sieve (14) in a cylindrical central compartment thereof.

7. An intermediate cartridge (3) for use in an air  
5 dryer according to any of the preceding claims.

9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20

**SUMMARY**



An air dryer comprises a base member (1) and a main cartridge (2) attached thereto and contains means (4) for filtering, cleaning and/or drying air passing therethrough.

- 5 An intermediate cartridge (3), containing means (11, 12, 14, 15) for filtering, cleaning and/or drying air passing therethrough, is arranged between the base member (1) and the main cartridge (2).



10

To be published with Fig 1.

030304

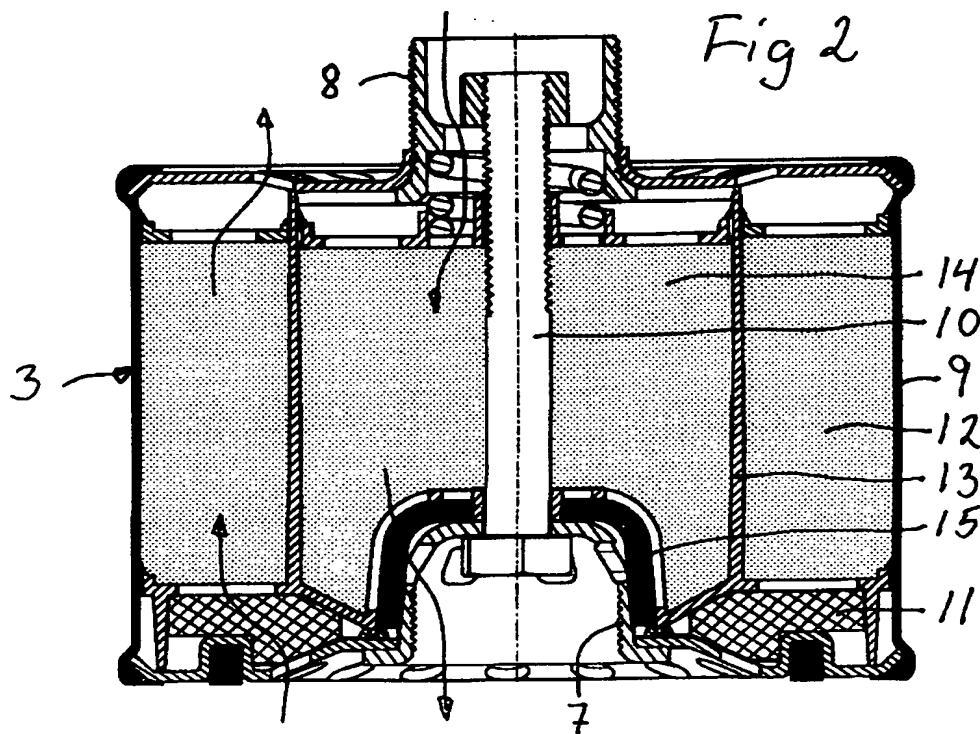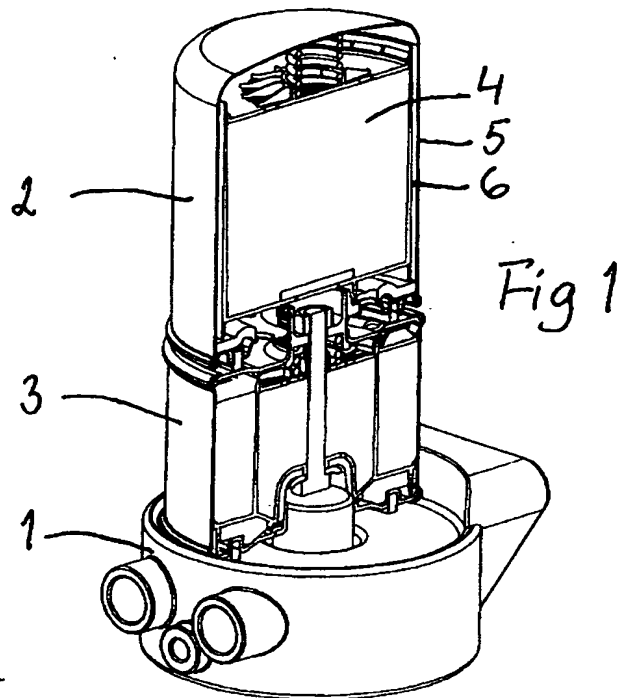

BEST AVAILABLE COPY

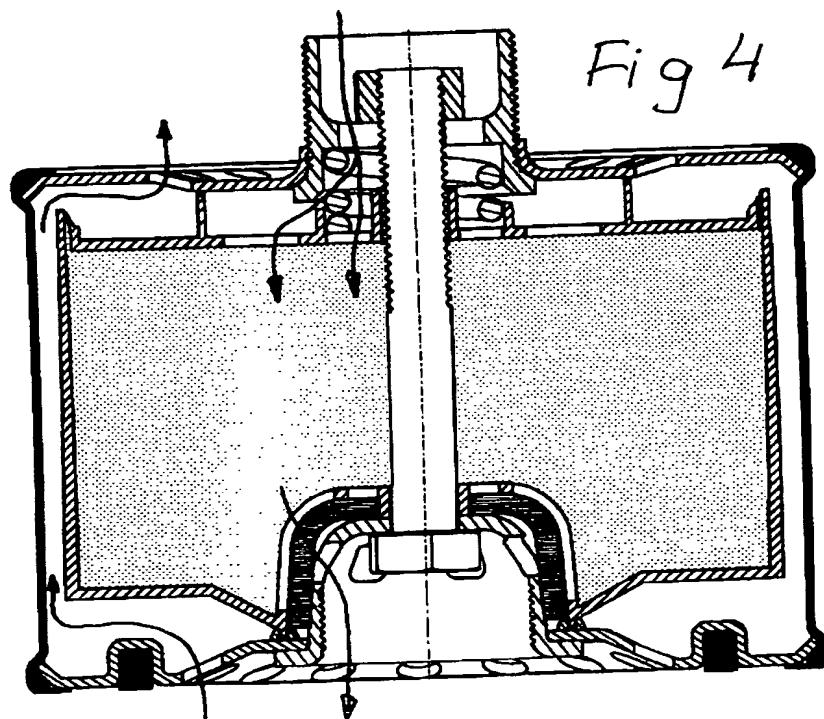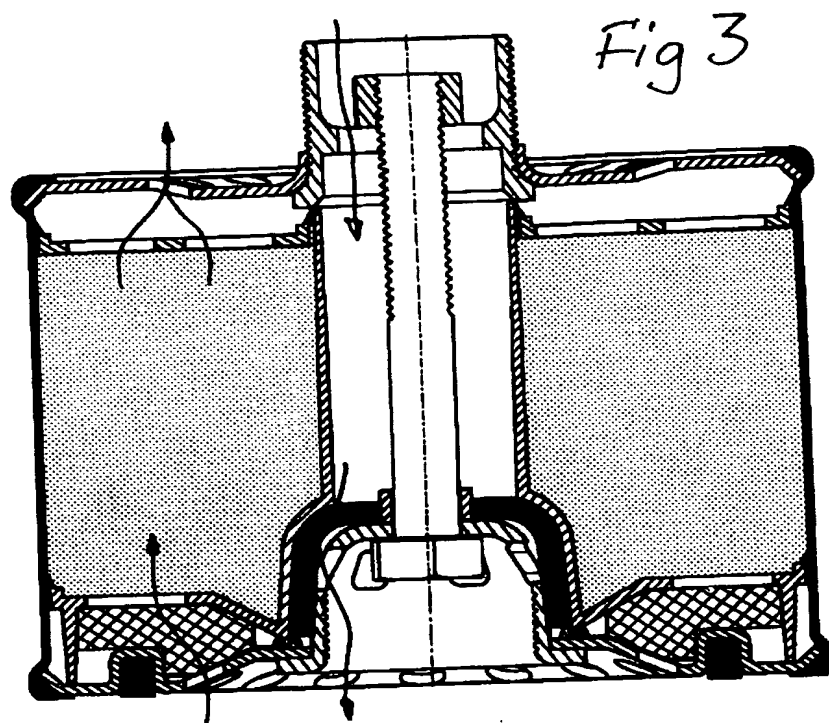

BEST AVAILABLE COPY